


External CANline A/D-Interface

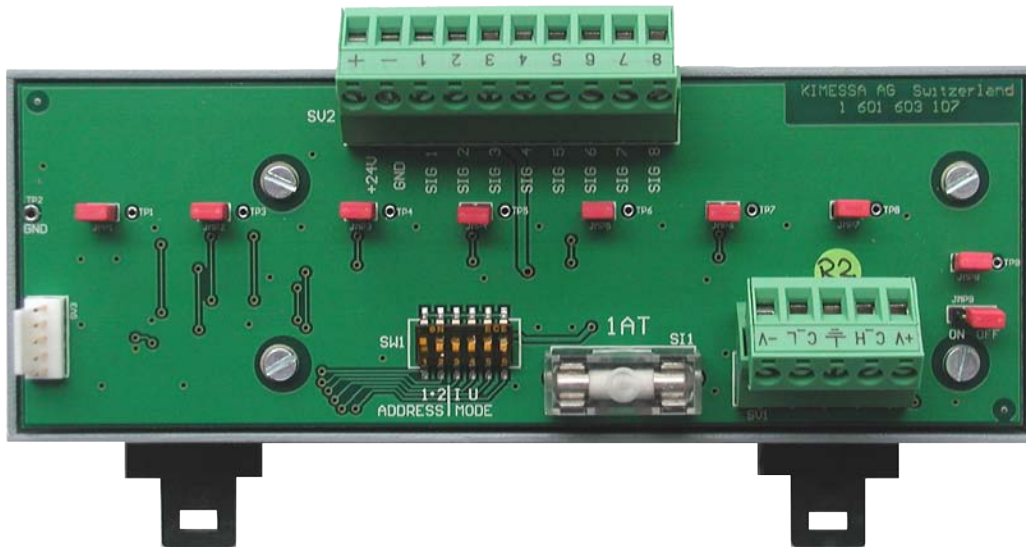

Features

- The CANline Interface is designed to facilitate 8 off 4-20mA detectors connected to a CANline Bus-System
- The A/D Interface, like a BUS sensor can be connected to the BUS at any location of the BUS network
- Maximum of 4 A/D Interface units can be connected to the CANline BUS-System
- Maximum of Eight 2 or 3-wire 4-20mA detectors per A/D Interface
- Preferably mount the A/D Interface in the MCC control cabinet
- DIN rail mounting with clips
- Swiss Quality

External CANline A/D-Interface

- Maximum of 4 A/D-Interfaces per BUS
- 8 x 4..20mA-Sensorinput
- DIN rail mounting

Main features:

Operating temperature: -20 °C ... +70 °C
 Air humidity: 5...95 % (non condensing)

Housing

Housing protection: none
 Material: Aluminum
 Weight: 300 g
 Dimension length: 80 mm
 Dimension width: 165 mm
 Dimension height: 55 mm

Specifications electronic

Operating voltage: 16.5...30 VDC
 Power consumption: 25 mA
 Sensor-Inputs: 8 x Analogue
 Switching output: none
 Connection: KIMESSA CANline-Bussystem
 4 x 1.00 mm², shielded

Specifications construction

Tests: CE

Electronic and Dimensions

